

533,407  
2004/039636  
(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number  
**WO 2004/039636 A1**

(51) International Patent Classification<sup>7</sup>: **B60R 11/02**

(21) International Application Number:  
PCT/US2003/034070

(22) International Filing Date: 27 October 2003 (27.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/421,990 29 October 2002 (29.10.2002) US

(71) Applicant (for all designated States except US): **INTIER  
AUTOMOTIVE INC.** [US/US]; 600 Wilshire Drive, Troy,  
MI 48084 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HAGER, Richard,  
A.** [US/US]; 1869 J. Anthony Pointe Lane, Commerce  
Township, MI 48382 (US). **BECKLEY, Daniel, V.**  
[US/US]; 16453 Dawn Light Drive, Fenton, MI 48430  
(US). **KIDD, Lisa, Ann** [US/US]; 26270 Regency Club  
Drive, Apt. 6, Warren, MI 48089 (US).

(74) Agents: **RASHID, Peter, J.** et al.; Rader, Fishman &  
Grauer PLLC, 39533 Woodward Avenue, Suite 140,  
Bloomfield Hills, MI 48304 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TRIM PANEL WITH INTEGRALLY FORMED ATTACHMENT MEMBER

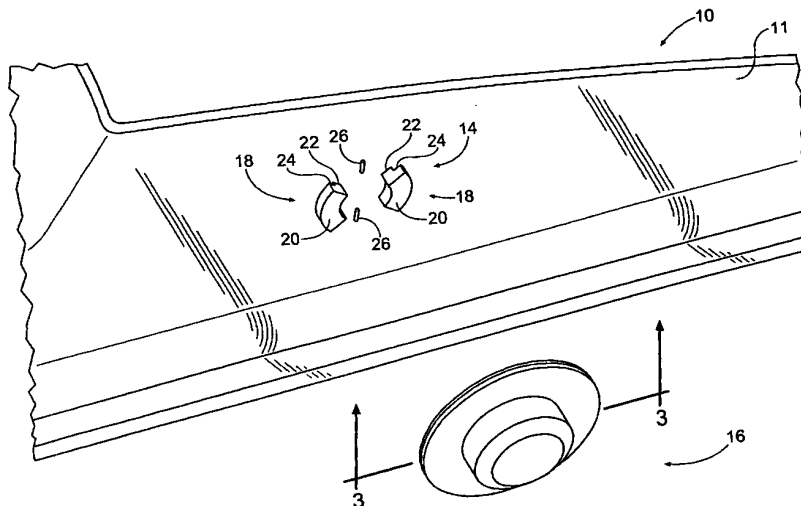

(57) Abstract: A trim panel (10) includes an integrally formed attachment member (14) for mounting an acoustic device (16), such as a loudspeaker, an exciter, a piezoelectric transducer, or the like, directly to the trim panel (10) without the need of a separate mounting member. The acoustic device (16) is attached to the trim panel (10) by use of a twist and lock fastening feature (18) in the form of a ramp surface (24) that draws the acoustic device (16) toward the trim panel (10) as the acoustic device (16) is rotated about the attachment member (14). Once the acoustic device (16) is rotated into place, one or more detents (26) are provided on the trim panel (10) and one or more corresponding detent grooves or recesses (32) are provided on the acoustic device (16) to lock the acoustic device (16) securely in place. The integrally formed attachment member (14) enables the inner and outer surfaces (11, 12) of the trim panel (10) to be a generally continuous surface.

WO 2004/039636 A1

**TRIM PANEL WITH INTEGRALLY FORMED ATTACHMENT MEMBER****BACKGROUND OF THE INVENTION****Field of the Invention**

[0001] The invention relates in general to the attachment of an accessory to a trim panel, and in particular to a trim panel with an integrally formed attachment member for mounting an acoustic device, such as a loudspeaker, an exciter, a piezoelectric transducer or the like, to the trim panel.

**Description of the Related Art**

[0002] An acoustic device, such as an electrodynamic exciter, applies bending wave energy to a trim panel to cause the trim panel to resonate and produce an acoustic output. Typically, the exciter comprises a magnet assembly rigidly fixed to a housing to define an annular gap, and a voice coil and coil former assembly disposed in the annular gap and rigidly fixed to the trim panel near to the geometric center thereof.

[0003] Typically, the acoustic device is mounted to the trim panel by using a separate mounting member, such as a mounting plate, that is fixedly attached to the trim panel using one or more fasteners, such as screws, or the like. After the separate mounting member is fixedly attached to the trim panel, such as by bonding, the acoustic device can be attached to the trim panel. However, the need for a separate mounting member and the time required to fixedly attach the separate mounting member to the trim panel increases the overall cost associated with mounting the acoustic device to the trim panel.

**SUMMARY OF THE INVENTION**

[0004] The inventors of the present invention have recognized these and other problems associated with a separate mounting member and the additional step necessary for fixedly attaching the separate mounting member to the trim panel. To this end, the inventors have developed a trim panel with an integrally formed attachment member for mounting an acoustic device, such as a loudspeaker, an exciter, a piezoelectric transducer, or the like, directly to the trim panel without the need of a separate mounting member. The acoustic device is attached to the trim panel by using a twist and lock fastening feature in the form of an attachment member with a ramp surface that draws the acoustic device

toward the trim panel as the acoustic device is rotated about the attachment member. Once the acoustic device is rotated into place, one or more detents are provided on the trim panel and corresponding one or more corresponding recesses are provided on the acoustic device to lock the acoustic device securely in place.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0005] In the drawings:

[0006] Fig. 1 shows a front perspective view of a trim panel with an integrally formed attachment for mounting a loudspeaker according to an embodiment of the invention;

[0007] Fig. 2 shows a rear perspective view of the trim panel of Fig. 1; and

[0008] Fig. 3 shows a cross section view of the trim panel of Fig. 1 taken along line 3-3 of Fig. 1.

#### **DESCRIPTION OF THE PREFERRED EMBODIMENT**

[0009] Referring to Figs. 1-3, a trim panel 10 includes an inner surface 11 and an outer surface 12. The trim panel 10 may be in the form of a vehicular headliner, door panel, valence panel, dashboard, package tray, or the like. For example, in the illustrated embodiment, the trim panel 10 may form a door panel in which the inner surface 11 forms a Class "B" surface that faces away from the interior of the vehicle and is not visible to the occupants, and the outer surface 12 forms a Class "A" surface that faces the interior of the vehicle and is visible to the occupants.

[0010] The trim panel 10 includes an attachment member 14 for attaching an acoustic device 16, such as a loudspeaker, an exciter, a piezoelectric transducer, or the like, to the trim panel 10. One aspect of the invention is that the attachment member 14 is integrally formed with the trim panel 10 using known molding techniques, such as injection molding, or the like. For example, the attachment member 14 can be integrally formed with the trim panel 10 by using slides in a mold tool (not shown) that forms the trim panel 10.

Preferably, the attachment member 14 is integrally formed with the trim panel 10 at a location of the trim panel 10 that has a substantially flat topography to accommodate the substantially flat profile of the acoustic device 16. However, the invention can be practiced at other locations of the trim panel that do not have a substantially flat topography.

[0011] Another aspect of the invention is that integrally formed attachment member 14 enables the inner and outer surfaces 11, 12 to be generally continuous, unlike conventional mounting systems in which an opening may be necessary for mounting the acoustic device 16.

[0012] In the illustrated embodiment, the attachment member 14 includes a pair of opposing, substantially identical mounting portions 18. Each mounting portion 18 is substantially arcuate in shape having a lower mounting portion 20 and an upper mounting portion 22. The lower mounting portion 20 has a greater width or radial thickness than the upper mounting portion 22 such that a ledge 24 is formed in the upper surface of the lower mounting portion 20, as best seen in Figs. 2 and 3. The upper mounting portion 22 projects outwardly substantially perpendicular to the inner surface 11 of the trim panel 10, whereas the lower mounting portion 20 projects outwardly substantially perpendicular to the upper mounting portion 22.

[0013] As best seen in Fig. 3, the ledge 24 of one of the mounting members 18 is separated from the inner surface 11 at a first distance,  $d_1$ , and the ledge 24 of the other one of the mounting members 18 is separated from the inner surface 11 at a second distance,  $d_2$ . In the illustrated embodiment, the distance,  $d_1$ , is greater than the distance,  $d_2$ , such that the ledges 24 provide a ramp surface to move the acoustic device 16 toward the trim panel 10 when the acoustic device 16 is rotated in a first direction about the vertical axis, V. On the other hand, the ramp surface causes the acoustic device 16 to move away from the trim panel 10 when the acoustic device 16 is rotated in a second direction that is opposite to the first direction. While the illustrated embodiment shows a pair of substantially identical opposing mounting members 18, it will be appreciated that the invention can be practiced with any desired number of mounting members, for example, a single mounting member forming an uninterrupted mounting member having a circular shape. The mounting member 18 also includes a pair of detents 26 for locking the acoustic device 16 in place.

[0014] Referring now to Figs. 2 and 3, the acoustic device 16 includes a substantially planar upper surface 28 and an opening 30 for mounting the acoustic device 16 to the attachment member 18. The upper surface 28 includes a pair of opposing detent grooves or recesses 32 capable of receiving the detents 26 integrally formed in the trim panel 10 to lock the acoustic device 16 in place. The opening 30 in the upper surface 28 of the acoustic

device 16 is approximately the same dimension as the distance between the outer surfaces of the upper mounting portions 22, as indicated by the dashed lines in Fig. 3. The opening 30 also includes a pair of cutouts 34 for allowing the acoustic device 16 to be inserted over the lower mounting portions 20 of the attachment member 18.

[0015] To install the acoustic device 16 to the trim panel 10, the acoustic device 16 is aligned with the attachment member 18 such that the cutouts 34 are directly over the lower mounting portions 20. Then, the acoustic device 16 is moved toward the attachment member 18 until the lower mounting portions 20 are received within the cutouts 34. Next, the acoustic device 16 is rotated in a first, counterclockwise direction to move the acoustic device 16 toward the trim panel 10. The acoustic device 16 is rotated until the upper surface is in close proximity to the trim panel 10 and the detents 26 are received in the detent grooves or recesses 32 to lock the acoustic device 16 in place. When the detents 26 are received in the detent grooves 32, the cutouts 34 are not positioned over the lower mounting portions 24 of the attachment member, as shown in Fig. 2. To remove the acoustic device 16, the acoustic device 16 is rotated in a second, clockwise direction.

[0016] As described above, the acoustic device 16 is attached to the trim panel 10 by use a twist and lock fastening feature in the form of the attachment member 18 with a ramp surface that draws the acoustic device 16 toward the trim panel 10 as the acoustic device 16 is rotated about the attachment member 18. In addition, the integrally formed attachment member 18 does not require a separate mounting plate for mounting the acoustic device 16 to the trim panel, unlike conventional mounting devices, thereby eliminating the need for holes in the trim panel for attaching the separate mounting plate to the trim panel. Thus, the integrally formed attachment member 18 provides a more aesthetic Class "A" surface than conventional attachment members.

[0017] While the invention has been specifically described in connection with certain specific embodiments thereof, it is to be understood that this is by way of illustration and not of limitation, and the scope of the appended claims should be construed as broadly as the prior art will permit.

**CLAIMS**

What is claimed is:

1. An assembly, comprising:  
  
a trim panel having an inner surface and a generally continuous outer surface;  
  
an attachment member integrally formed with said inner surface; and  
  
an acoustic device capable of being mated to said inner surface of said trim panel.
2. The assembly according to Claim 1, wherein an upper surface of said device is generally planar to said inner surface of said trim panel when said device is mated to said trim panel.
3. The assembly according to Claim 1, wherein said attachment member includes a ramp surface such that rotation of said device draws said device toward said trim panel.
4. The assembly according to Claim 3, wherein said attachment member includes at least one generally L-shaped mounting portion defining said ramp surface.
5. The assembly according to Claim 3, wherein said attachment member includes two diametrically opposed generally L-shaped mounting portions to define said ramp surface.

6. The assembly according to Claim 3, wherein said device is rotated counterclockwise along said ramp surface toward said trim panel.
7. The assembly according to Claim 3, wherein said device is rotated clockwise along said ramp surface away from said trim panel.
8. The assembly according to Claim 3, wherein said attachment member defining said ramp surface is generally arcuate in shape.
9. The assembly according to Claim 1, wherein said attachment member includes at least one detent and said device includes at least one corresponding recess for receiving said detent to fixedly attach said device to said trim panel.
10. The assembly according to Claim 9, wherein said at least one detent is integrally formed on said inner surface of said trim panel.
11. The assembly according to Claim 1, wherein said device includes at least one detent and said attachment member includes at least one corresponding recess for receiving said detent to fixedly attach said device to said trim panel.
12. The assembly according to Claim 1, wherein said trim panel includes two diametrically opposed detents and said device includes two diametrically opposed recesses for receiving said detents to fixedly attach said device to said trim panel.

13. The assembly according to Claim 1, wherein said inner surface of said trim panel is generally continuous.

14. The assembly according to Claim 1, wherein said device has an opening to receive said attachment member.

15. The assembly according to Claim 14, wherein said opening further includes a pair of diametrically opposed cutouts to receive said attachment member.



1/3

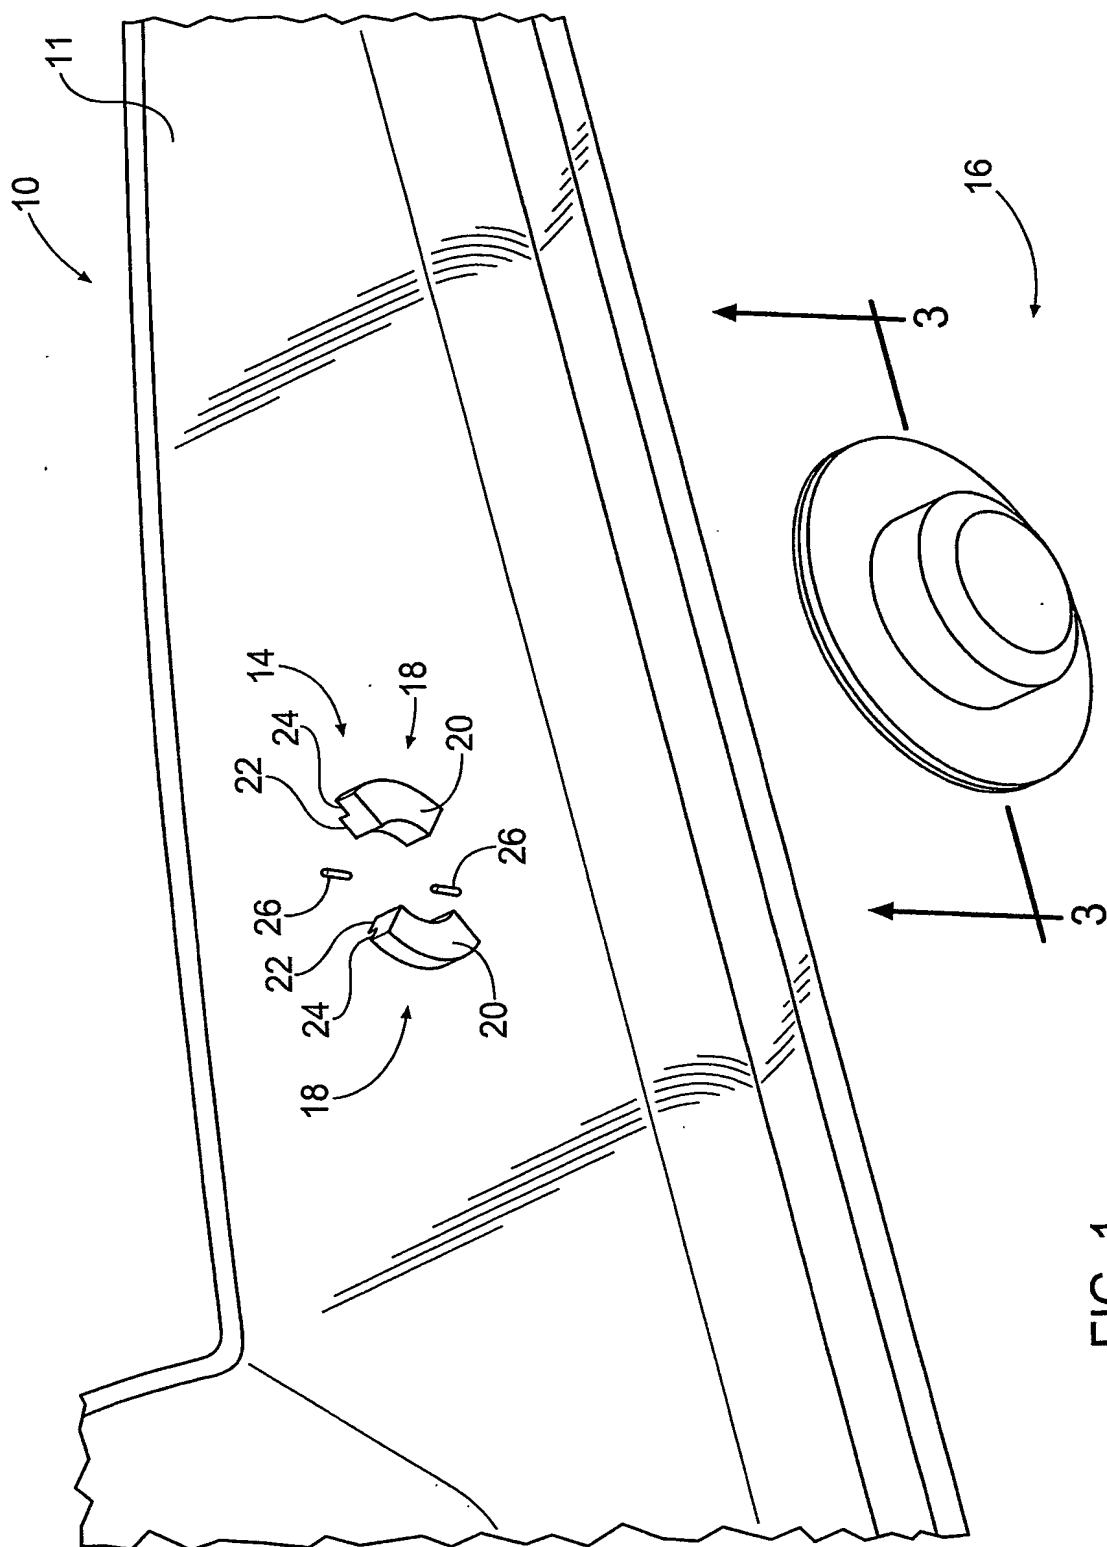


FIG. 1

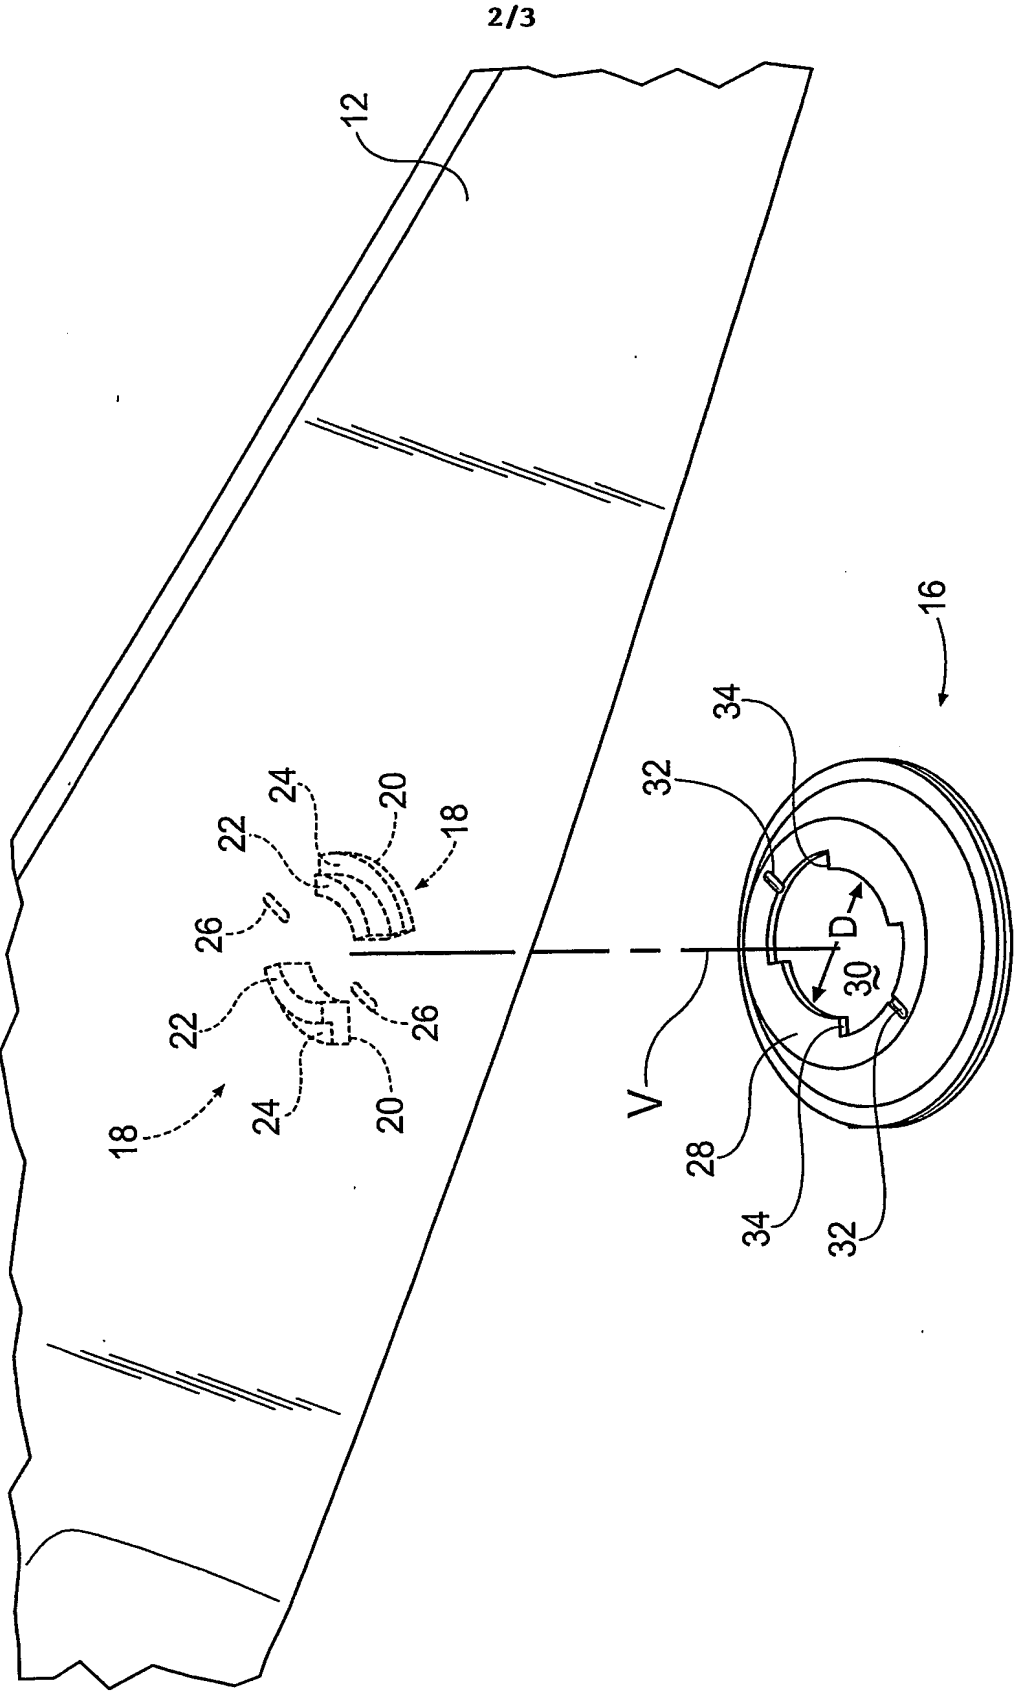


FIG. 2



# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 03/34070

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B60R11/02

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B60R H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 6 061 460 A (SEO YEOL-GU) 9 May 2000 (2000-05-09) abstract; figures 1,4-8B column 5, line 17 -column 8, line 18 ---	1,2,9-15 3
X A	EP 0 281 084 A (ELECTRONIC WERKE DEUTSCHLAND) 7 September 1988 (1988-09-07) abstract; figures column 1, line 43 -column 2, line 54 ---	1,2,9-13 3,14
X A	FR 2 809 691 A (ECIA EQUIP COMPOSANTS IND AUTO) 7 December 2001 (2001-12-07) abstract; figures page 2, line 24 -page 4, line 22 --- -/--	1,2,9, 10,13 3,11,12, 14

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

16 February 2004

Date of mailing of the international search report

26/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

D'Sylva, C

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/34070

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 012, no. 352 (M-744), 21 September 1988 (1988-09-21) & JP 63 110047 A (TOYODA GOSEI CO LTD), 14 May 1988 (1988-05-14) abstract	1,2,13
A	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 06, 31 July 1995 (1995-07-31) & JP 07 058535 A (NIPPON PLAST CO LTD), 3 March 1995 (1995-03-03) abstract	1,2,9, 11-14
A	PATENT ABSTRACTS OF JAPAN vol. 2003, no. 02, 5 February 2003 (2003-02-05) & JP 2002 286834 A (DENSO CORP), 3 October 2002 (2002-10-03) abstract	1
A	US 6 377 695 B1 (AZIMA HENRY ET AL) 23 April 2002 (2002-04-23) figures abstract column 5, line 53 -column 7, line 5	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/34070

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6061460	A	09-05-2000	KR 225059 B1 TW 382084 B	15-10-1999 11-02-2000
EP 0281084	A	07-09-1988	DE 3707270 A1 AT 110918 T DE 3851244 D1 EP 0281084 A2 JP 1229597 A	15-09-1988 15-09-1994 06-10-1994 07-09-1988 13-09-1989
FR 2809691	A	07-12-2001	FR 2809691 A1	07-12-2001
JP 63110047	A	14-05-1988	NONE	
JP 07058535	A	03-03-1995	NONE	
JP 2002286834	A	03-10-2002	NONE	
US 6377695	B1	23-04-2002	AT 224824 T AU 740285 B2 AU 8870398 A BR 9812167 A CN 1094442 B DE 69808308 D1 DE 69808308 T2 EP 1007390 A1 ES 2185203 T3 WO 9911490 A1 HK 1025612 A1 JP 2001514118 T TW 496833 B ZA 9807584 A	15-10-2002 01-11-2001 22-03-1999 18-07-2000 20-11-2002 31-10-2002 31-07-2003 14-06-2000 16-04-2003 11-03-1999 03-01-2003 11-09-2001 01-08-2002 23-02-1999